

AM-200

AirMedia Wireless Presentation

Crestron AirMedia technology allows for wireless presentation of content from a personal computer, laptop, or mobile device via a Wi-Fi® wireless network. Airmedia enables presentation of Full HD video at frame rates up to 30 fps. Desktop and laptop computer users can present content using downloadable client software, the AirMedia extension for Google Chrome™ browser, or Miracast™¹ screen mirroring technology (Windows 10 computers only). Android and iOS mobile devices can present with the AirMedia app or the Crestron PinPoint™ app. For more information about AirMedia, visit

www.crestron.com/airmedia.²

HDMI Connectivity

In addition to AirMedia, the AM-200 includes an HDMI input for direct connection of a mini-PC or other local source, or a portable laptop computer via an optional wall plate or cable. The HDMI input supports HD 1080p signals.³

Native Appspace Functionality

The AM-200 integrates with the Appspace content management application for digital signage which allows the AM-200 to show Appspace content on a connected display when a space is not in use.

Works with Crestron Airboard™ Whiteboard Capture System

The AM-200 works with the Crestron Airboard™ Whiteboard Capture System (CCS-WB-1). Simply pair the CCS-WB-1 with the AM-200, and all of the CCS-WB-1 controls are available on the associated touch screen.⁴ Manage remote participants, start and stop a whiteboard session, route the whiteboard content to the associated display, and email a snapshot or timeline of the whiteboard session.⁵

Enhanced Onscreen Experience

When no presentation source is connected, the AM-200 displays a customizable welcome screen on the room display with simple instructions for connecting and presenting. Integration with Microsoft Exchange (for users of Outlook® and Office 365®), Google Calendar™, or [Crestron Fusion](http://www.crestron.com/fusion)® room scheduling allows the space's availability and details about the current scheduled meeting to appear on-screen. As the meeting progresses, notifications appear periodically to indicate how much time is left in the meeting and what's scheduled next for the space. Pop-up messages, sent from Crestron Fusion, may also appear in the event of an emergency or other important announcement.

Crestron XiO Cloud Provisioning and Management

The AM-200 is compatible with the Crestron XiO Cloud™ service, which is an IoT (Internet of Things) based platform for remotely provisioning, monitoring, and managing Crestron devices across an enterprise or an entire client base. The service enables installers and IT managers to deploy and manage thousands of devices in the amount of time it previously took to manage just one. As part of the AM-200 system, the Crestron XiO Cloud service allows for network



- *Complete room solution provides wired and wireless presentation with AirMedia® 2.0 wireless presentation from laptops, smartphones, and tablet devices, while delivering enterprise-grade security and content encryption to protect privacy and ensure compliance with IT policies*
- *Use with optional Crestron Airboard™ Whiteboard Capture System to display and share whiteboard content*
- *Integration with Appspace® digital signage software platform for content display when system is not in use*
- *HDMI® input provides wired connectivity for sources*
- *Customizable welcome screen provides clear instructions for presenters, displaying space availability, meeting details, and other messages on-screen*
- *Natively integrates with Microsoft® Office 365®, Outlook®, Google Calendar™, and other calendaring applications as well as Crestron Fusion® room scheduling and enterprise management services*
- *Crestron XiO Cloud™ service support enables remote provisioning and management*

The Media Presentation System 200 ([AM-200](http://www.crestron.com/AM-200)) provides secure wired and wireless presentation in lounges, lobbies, and open spaces, and integrates with popular calendaring platforms to maximize use. It is ideal for organizations with a dispersed workforce, open floor plans, and reliance on mobile devices to present.

Connect and Present

The AM-200 mounts invisibly behind a wall-mount display and enables wired or wireless presentation with autoswitching. It features AirMedia 2.0 wireless presentation capability, an HDMI® input, HDMI output to the display (HD or WUXGA), and auto-on/off display control via CEC, serial, or IR. Connecting a source selects that input automatically and instantly displays the source image on the display. There's no programming required, no dongles to plug in, and no remotes to lose or batteries to replace.



management and provisioning, remote firmware updates and system alerts. For more information, visit www.crestron.com/xiocloud.

Crestron Fusion Room Monitoring

AM-200 presentation spaces can be managed and centrally monitored through the Crestron Fusion enterprise management service. By adding an optional wireless occupancy sensor, the AM-200 can report and log when people are present in the space, turning the display on and off accordingly, and returning unused spaces to inventory to maximize availability for new bookings. Crestron Fusion software supports room scheduling, and can integrate with a variety of third-party calendaring applications. In the event of a technical issue, instant alerts notify the help desk to rapidly resolve problems and maximize uptime and workflow. For more information about Crestron Fusion, visit www.crestron.com/fusion.

Enterprise-Grade Security

The AirMedia Presentation System is an enterprise-grade solution that can be deployed across hundreds of spaces, and set up easily using just a web browser, Crestron Fusion, or Crestron XiO Cloud service. It employs standard network security protocols, including 802.1x network access control, Active Directory® authentication, and AES content encryption, to protect privacy and ensure compliance with your organization’s IT policies.

Add-on Control Options

Manual control of the AM-200 can be enabled by adding a Crestron TSW-760 or TSW-1060 series touch screen. The touch screen provides a small-screen view of the room schedule and meeting details, with controls for input source selection, display power on/off, and display volume and mute, plus a help page. Additional control options include a wireless 4-button keypad ([ZUMMESH-KP10AMBATT](#) series⁶), which provides simple on/off and volume control, a Power over Ethernet occupancy sensor ([CEN-ODT-C-POE](#)), and a wireless occupancy sensor ([ZUMMESH-PIR-OCCUPANCY-BATT](#)) for enhanced automation and room monitoring functionality. The wireless keypad and wireless occupancy sensor require the addition of the AV Bridge accessory ([ZUMMESH-AVBRIDGE](#) or [ZUMMESH-AVBRIDGE-I](#)), which connects to the AM-200 via USB.

Specifications

Communications

Ethernet	10/100 Mbps, auto-switching, auto-negotiating, auto-discovery, full/half duplex, TCP/IP, UDP/IP, DHCP, SSL, TLS, SSH, SFTP (SSH File Transfer Protocol), IEEE 802.1x, Active Directory authentication, HTTPS web browser setup and Crestron XiO Cloud client, 802.3af and 802.3at Type 1 compliant
AirMedia	(Via Ethernet) IPv4, mDNS, TLS, AES ²
USB Host	USB 2.0 for optional AV Bridge (ZUMMESH-AVBRIDGE or ZUMMESH-AVBRIDGE-I (sold separately)) for use with wireless keypad control and occupancy sensing ⁶ or the AirMedia USB Adapter (AM-USB-WIFI or AM-USB-WIFI-I (sold separately)) for use with Miracast screen mirroring technology
USB Device	USB 2.0 for computer console (installer setup and firmware update)
RS-232	2-way display device control up to 115.2k baud with hardware and software handshaking
IR/Serial	1-way display device control via infrared up to 1.1 MHz or serial TTL/RS-232 (0-5 V) up to 19.2k baud
HDMI Input	HDCP 1.4, EDID; Supports management of HDCP and EDID
HDMI Output	HDCP 1.4, EDID, CEC; Supports management of HDCP and EDID

AirMedia²

OS Support	Apple® iOS®, Android™, Windows® 7, Windows 8, Windows 10, macOS®, Chrome OS™
Video Frame Rate	Up to 30 fps, audio supported
Output Resolutions	640x480@60Hz, 800x600@60Hz, 1024x768@60Hz, 1280x720@50Hz (720p50), 1280x720@60Hz (720p60), 1280x800@60Hz, 1366x768@60Hz, 1440x900@60Hz, 1600x900@60Hz, 1600x1200@60Hz, 1680x1050@60Hz, 1920x1080@50Hz (1080p50), 1920x1080@60Hz (1080p60)

NOTE: Audio is not supported on Android devices

NOTE: All video inputs will be scaled to the selected HDMI output resolution.





Bitrate Peak 0.25 to 8.5 Mbps, variable depending on content complexity

Bitrate Average 1.4 Mbps typical

NOTES:

- The bitrate for Apple native mirroring may deviate from above depending on the OS version and content
- The AirMedia Extension for the Google® Chrome browser relies on web technologies for screen sharing that are built-in to the web browser. Performance variations with motion video (quality and frame rate) may occur based upon the encoding capabilities of the Chrome OS device and the nature of the content being displayed (i.e., high-motion video).

Audio Format Stereo

Video

Input Signal Types AirMedia, HDMI (DVI & Dual-Mode DisplayPort™ compatible³)

Output Signal Types HDMI (DVI compatible³)

Maximum Input Resolution 1920x1080@60Hz (HD 1080p60), 4:4:4, 36 bit color depth

NOTE: Other input resolutions are supported at pixel clock rates up to 148 MHz; interlaced video is not supported.

Output Resolutions 640x480@60Hz, 800x600@60Hz, 1024x768@60Hz⁷, 1280x720@50Hz (720p50), 1280x720@60Hz (720p60), 1280x800@60Hz⁷, 1366x768@60Hz⁷, 1440x900@60Hz⁷, 1600x900@60Hz⁸, 1600x1200@60Hz, 1680x1050@60Hz⁷, 1920x1080@50Hz (1080p50), 1920x1080@60Hz (1080p60), 1920x1200@60Hz

NOTE: All video inputs will be scaled to the selected HDMI output resolution.

Background & Logo File Support GIF, JPEG, PNG

Audio

Input Signal Types AirMedia, HDMI (Dual-Mode DisplayPort compatible³)

Output Signal Type HDMI

Input/Output Format 2 channel LPCM

NOTE: Audio input signals are passed to the output without any processing. Volume control capability requires a display device with discrete volume, up, down, and mute commands available via CEC, IP, IR, or RS-232.

Connectors

Console (1) Micro-USB Type B connector, female; USB 2.0 device port for computer console (installer setup)

IR (1) 4-pin 3.5 mm detachable terminal block; IR/Serial output port for display device control; IR output up to 1.1 MHz; 1-way serial TTL/RS-232 (0-5 V) up to 19200 baud

NOTE: IR port #2 is not used. [IRP2](#) emitter sold separately.

COM (1) 5-pin 3.5 mm detachable terminal block; Bidirectional RS-232 port for display device control; Up to 115.2k baud, hardware and software handshaking support

HDMI INPUT (1) HDMI Type A connector, female; HDMI digital video/audio input; (DVI & Dual-Mode DisplayPort compatible³)

HDMI OUTPUT (1) HDMI Type A connector, female; HDMI digital video/audio output; (DVI compatible³)

USB (1) USB Type A connector, female; USB 2.0 host port for AV Bridge ([ZUMMESH-AVBRIDGE](#) or [ZUMMESH-AVBRIDGE-I](#) (sold separately)) or AirMedia USB Adapter ([AM-USB-WIFI](#) or [AM-USB-WIFI-I](#) (sold separately))

LAN PoE (1) 8-pin RJ45 connector, female; 10Base-T/100Base-TX Ethernet port and PoE PD port

24 VDC 0.75 A (1) 2.1 x 5.5 mm DC power connector; 24 Volt DC power input; [PW-2407WU](#) power pack sold separately

Ground (1) 6-32 screw; Chassis ground lug





Controls & Indicators

PWR	(1) Green LED, indicates operating power supplied via the local power pack or PoE, flashes while booting
RESET	(1) Recessed pushbutton for hardware reset
SETUP	(1) Red LED and (1) recessed pushbutton for Ethernet setup, momentarily displays the device's IP address at the HDMI output when pressed
ONLINE	(1) Green LED (not used)
HDMI IN & OUT	(2) Green LEDs, indicate HDMI signal presence at the HDMI input or output
LAN PoE	(2) LEDs, green LED indicates Ethernet link status, amber LED indicates Ethernet activity

Power

Power over Ethernet	IEEE 802.3at Type 1 (802.3af compatible) Class 0 (12.95 W) PoE Powered Device
Power Pack (sold separately)	Input: 100-240 VAC, 50/60 Hz; Output: 0.75 A @ 24 VDC; Model: PW-2407WU
Power Consumption	8 W (typical)

Environmental

Temperature	32° to 104° F (-0° to 40° C)
Humidity	10% to 95% RH (non condensing)
Heat Dissipation	27.3 BTU/hr

Enclosure

Chassis	Metal, black finish, with (2) integral mounting flanges, vented sides
Mounting	Freestanding, surface mount, or attach to a single rack rail

Dimensions

Height	6.42 in. (163 mm)
Width	7.40 in. (188 mm)
Depth	1.35 in. (35 mm)

Weight

1 lb, 3.6 oz (554 g)

Compliance

UL® Listed for US & Canada, CE, IC, FCC Part 15 Class B digital device

Model

AM-200
Media Presentation System 200

Available Accessories

AM-USB-WIFI

AirMedia® USB Adapter with Wi-Fi® Connectivity

AM-USB-WIFI-I

AirMedia® USB Adapter with Wi-Fi® Connectivity, International

CCS-WB-1

Crestron AirBoard™ Whiteboard Capture System

CEN-ODT-C-POE

Dual-Technology Occupancy Sensor, PoE

CEN-SW-POE-5

5-Port PoE Switch

CEN-SW-POE-16

16-Port Managed PoE Switch

PWE-4803RU

PoE Injector

SW-FUSION-C-3

Crestron Fusion® Cloud; 250 rooms; 3-year

SW-FUSION-P-L

Crestron Fusion® On-premises; Unlimited rooms; lifetime

SW-HS-x-C

Crestron Fusion® Cloud Room Scheduling

SW-HS-x-P

Crestron Fusion® On-premises Room Scheduling

SW-XIOC-P Series

Crestron XiO Cloud Premium Provisioning and Management Service for one device

SW-XIOC-S Series:

Crestron XiO Cloud Standard Provisioning and Management Service for one device

TSW-760

7 in. Touch Screen

TSW-1060

10 in. Touch Screen

ZUMMESH-AVBRIDGE

AV Bridge – Wireless Control Integration Module

ZUMMESH-AVBRIDGE-I

AV Bridge – Wireless Control Integration Module, International

ZUMMESH-KP10AMBATT

AirMedia® Wireless Keypad for AM-200 & AM-300, Battery-Powered

ZUMMESH-PIR-OCCUPANCY-BATT


Züm™ Wireless Battery-Powered Occupancy Sensor





Notes:

1. Miracast operations requires the AM-USB-WIFI or AM-USB-WIFI-I (sold separately). Use of the AM-USB-WIFI or AM-USB-WIFI-I prevents use of the ZUMMESH-AVBRIDGE, ZUMMESH-AVBRIDGE-I, ZUMMESH-KP10AMBATT, and ZUMMESH-PIR-OCCUPANCY-BATT.
2. AirMedia wireless presentation requires a wired network connection between the AM-200 and an external Wi-Fi wireless access point (not included). Laptops may alternately connect to AirMedia using a wired Ethernet connection. Full-motion video performance is dependent upon the performance of the network and the sending device. Computer client software and mobile device apps are available for download at <https://www.crestron.com/airmedia>.
3. Using an appropriate adapter or interface cable, the HDMI input can support DVI and Dual-Mode DisplayPort sources, and the HDMI output can provide a DVI signal. CBL-HD-DVI interface cables are available separately.
4. Required for operation. Sold separately.
5. Crestron Airboard integration with the AM-200/300 is entirely configuration-based. When the Crestron Airboard device is paired with the AM-200/300, programmatic control is not supported in SIMPL Windows or SIMPL# Pro. If custom program controls for a Crestron Airboard device are required, use a DGE-100 in place of an AM-200/300.
6. Wireless keypad functionality is limited to power and volume control, and requires use of a display device that supports discrete power on, power off, volume up, and volume down commands via CEC, IP, IR, or RS-232.
7. With or without reduced blanking.
8. With reduced blanking only.

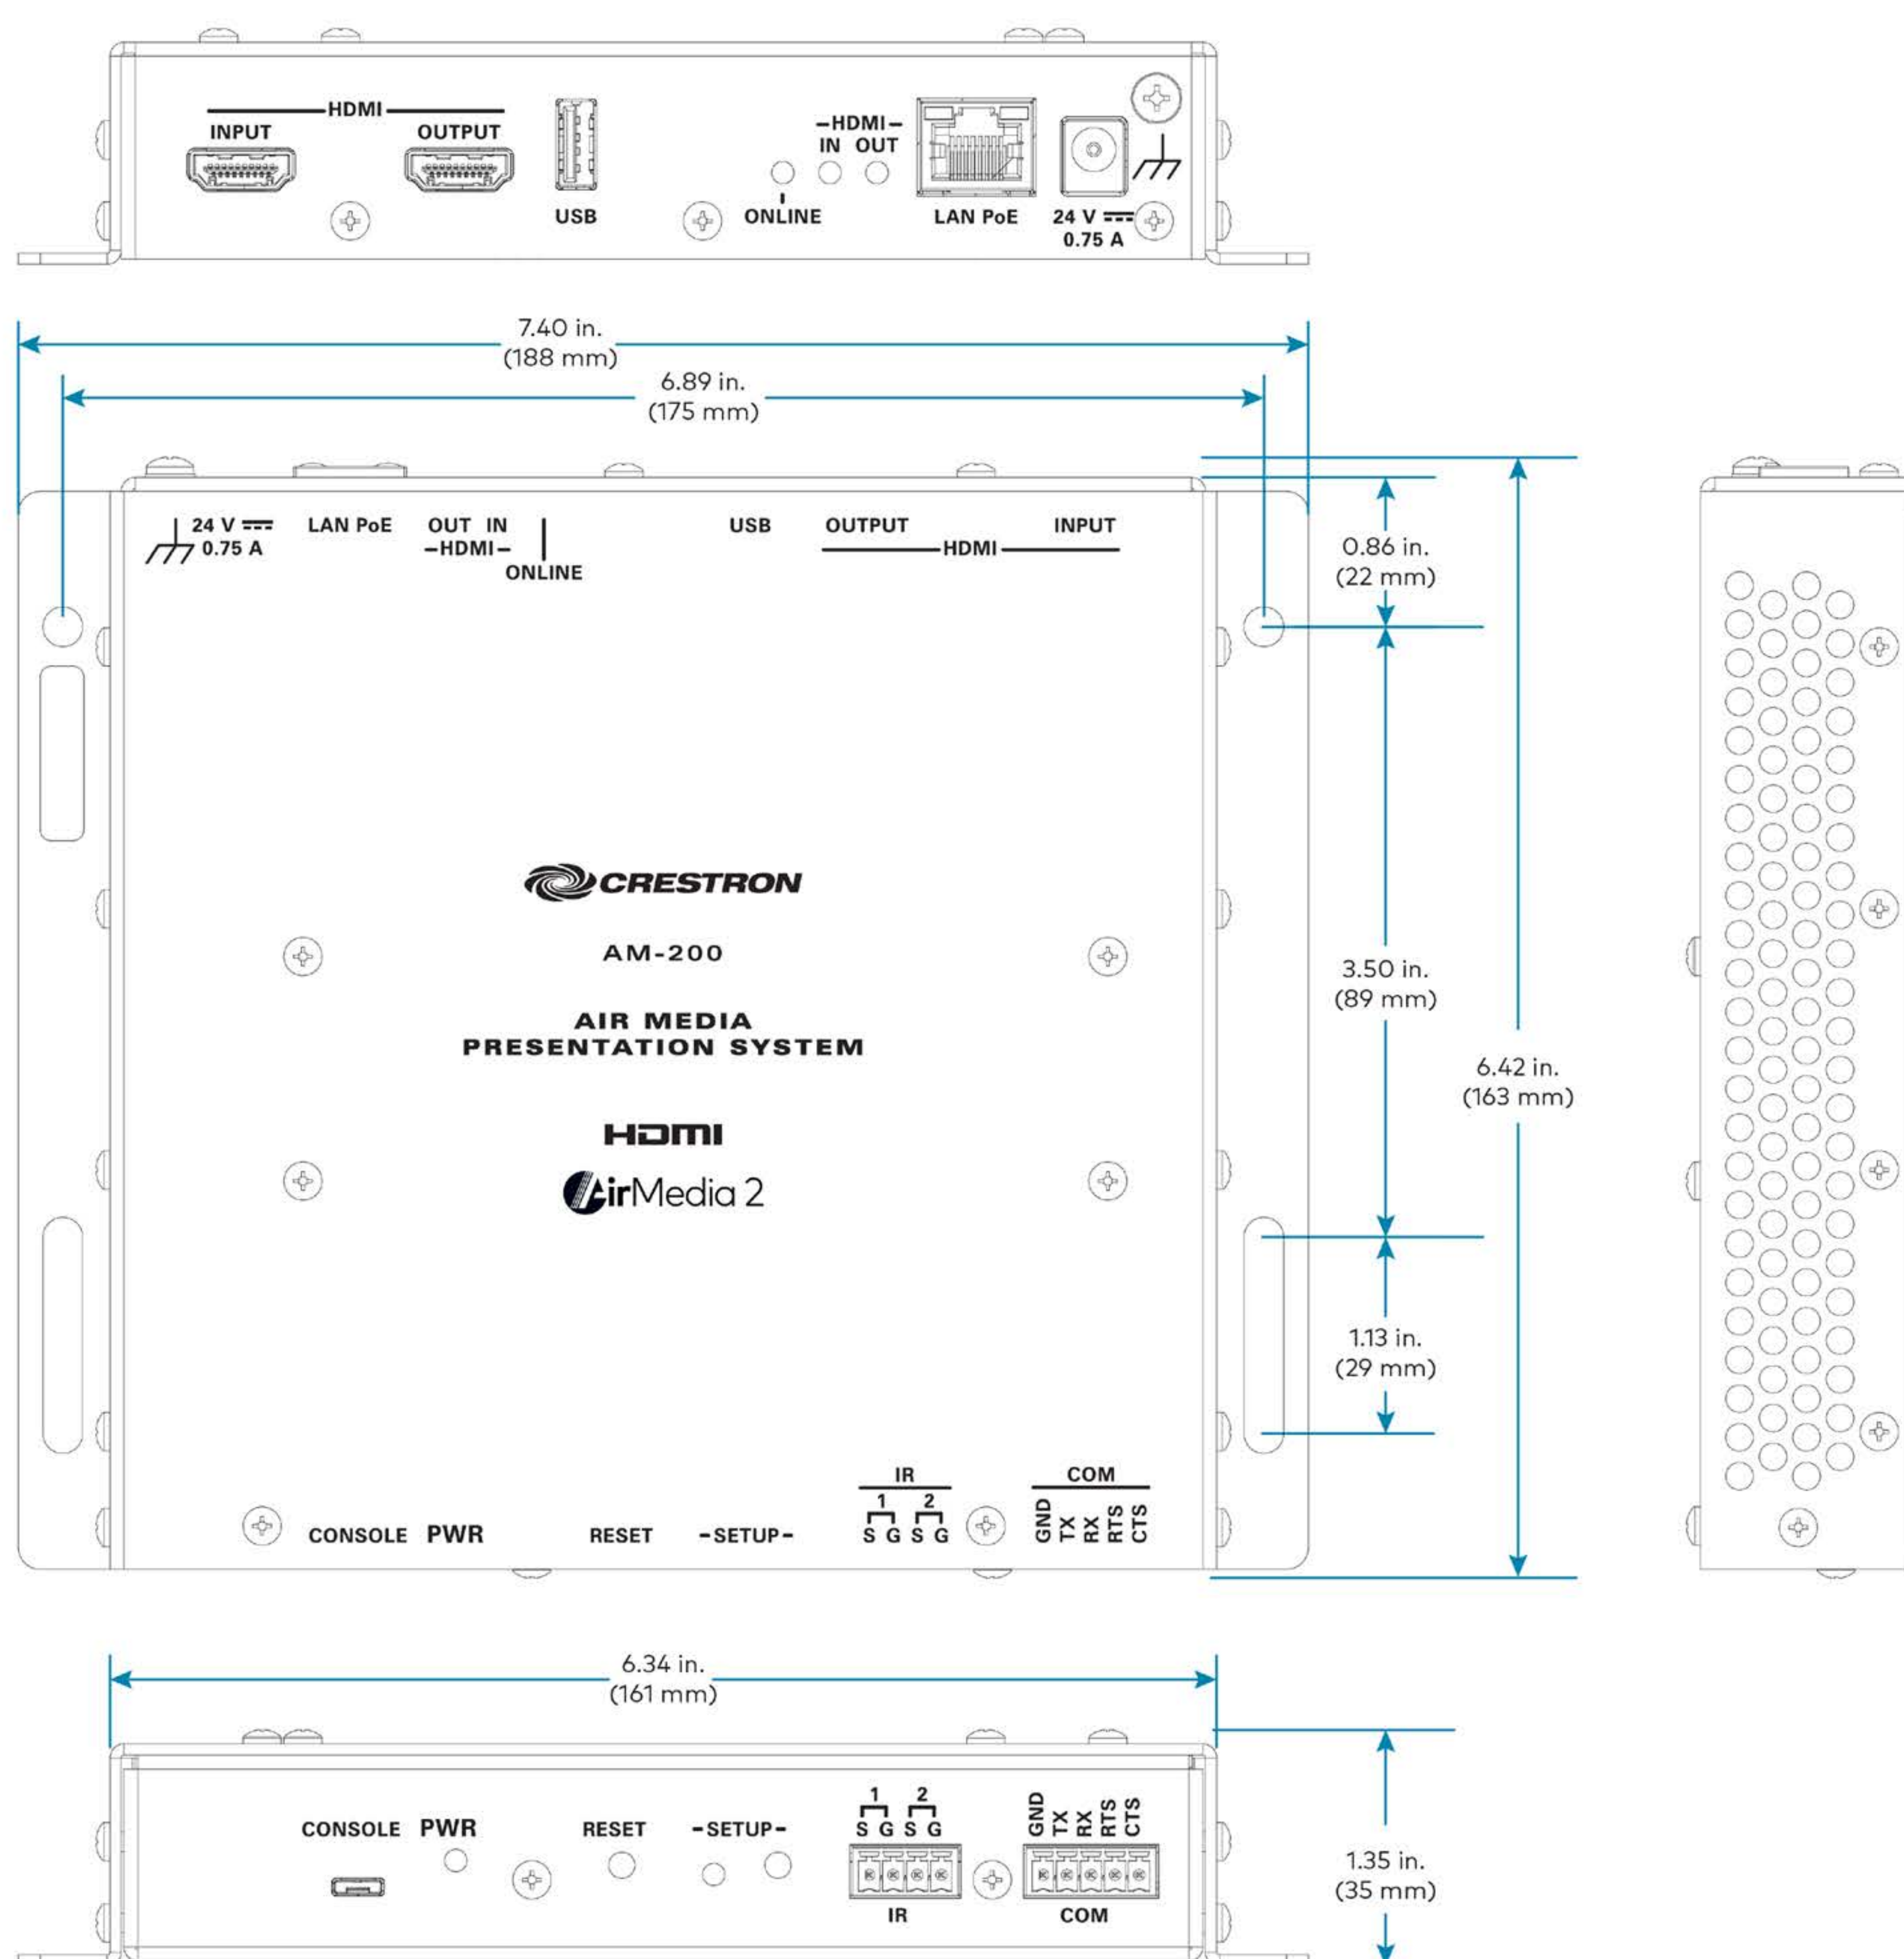

22 rue Christophe Plantin L-2339 Luxembourg

CONTACT
office@hauser.lu
Tél. : 48.16.60

www.hauser.lu